

Specification:


BSD-3013

- * Miniature floor mount
- * Universal magnet for flexibility in mounting
- * Extrude aluminum casings for harsh environments
- * Wire: #22AWG with 22" armored cable
- * Longer cable available on request
- * Switches or magnets are available separately
- * Jacket cable available: BSD3013-JK
- * Resistor, Diode and Supervisory Loop available on request\

Overhead Door Contact



Dimension (mm):

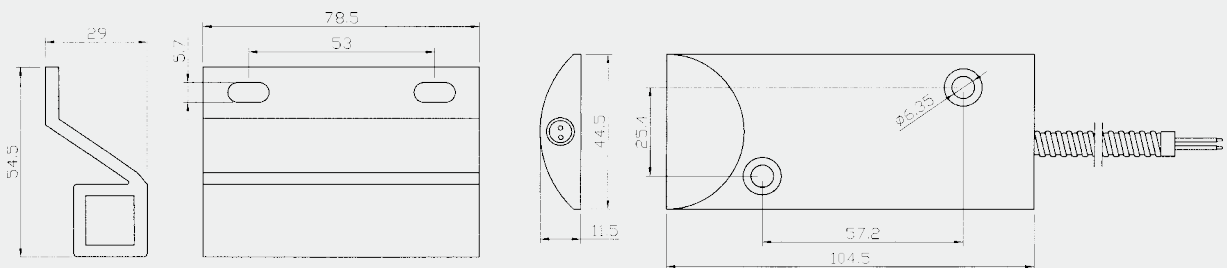

MAGNET

SWITCH

Order Information:

Part Number	Loop Type	Reed Form	Closed Gap [Inch(mm)]	Depature Gap [Inch(mm)] (Ohm)	Maximum Initial Contact Resistance (W)	Maximum Contact Rating (VDC/VAC)	Maximum Switching Voltage (A)	Maximum Switching Current
BSD-3013	Closed	N/O	2.95 (75)	3.18 (80)	0.150	7.5	100	0.4
BSD-3013WG	Closed	N/O	3 ¹ / ₂ (90)	3.75 (95)	0.150	7.5	100	0.4
BSD-3013A	Open	N/C	2 ¹ / ₂ (65)		0.150	3	30	0.2
BSD-3013C	Closed & Open	SPDT	2 ¹ / ₂ (65)		0.150	3	30	0.2
BSD-3013D	DPDT	2-SPDT	2 ¹ / ₂ (65)		0.150	3	30	0.2

* These magnetic contact switches shall be installed so that a door or other movable opening cannot be opened more than 2 inches (51mm) without initiating an alarm. Switches exceeding 2 inches can not be installed per UL681-the Standard for installation and Classification of Burglar and Holdup Alarm