



WS-1

Water Sensor



Features:

- Install anywhere water damage may occur
- Detects conductive, non-flammable liquids
- For open loop circuits
- Automatic reset


Parts List:

1x Water Sensor 2x Screws
1x Manual

Specifications:

Loop type	Open loop	
Electrical configuration	N.O.	
Operating voltage	5~24 VDC	
Current draw (max.)	12VDC	30mA
	24VDC	50mA
Wire	6ft (1.8m) 2C (22AWG)	
Case	Color	White
	Material	ABS
Operating temperature	32°~140° F (0°~60° C)	
Dimensions	2 1/2"x 1 1/2"x 1 1/2" (64x13x13 mm)	
Weight	1.6-oz (44g)	


Dimensions:

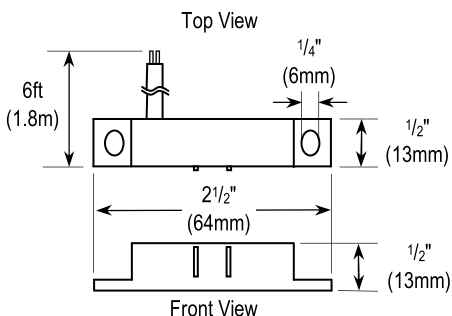

Sample Application:


NOTE: Connect Water Sensor to an alarm control panel or relay module. Do not wire directly to siren, strobe, etc. After installation, test unit with damp sponge or paper. Inspect annually and replace if there is any corrosion or damage.

Alarm Control Panel



*If the panel uses an EOL resistor (not included), then 6VDC is the minimum requirement.

Relay Module

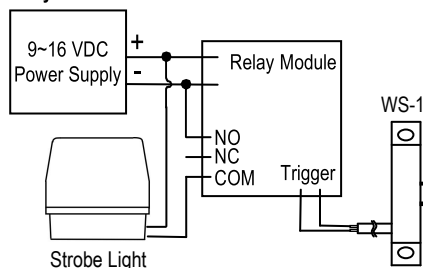

Safety is Sensor Technology.

Ningbo Sentek Electronics Co., Ltd.

Tel: +86 574-8715 5635 Fax: +86 574-8715 5951

E-mail: sales@sentek.cc http://www.sentek.cc

Add: 448 Yingchun Rd, Wangchun Industrial Park, Ningbo, China

REV.1.0